



ComAnt[®] Communications Antennas

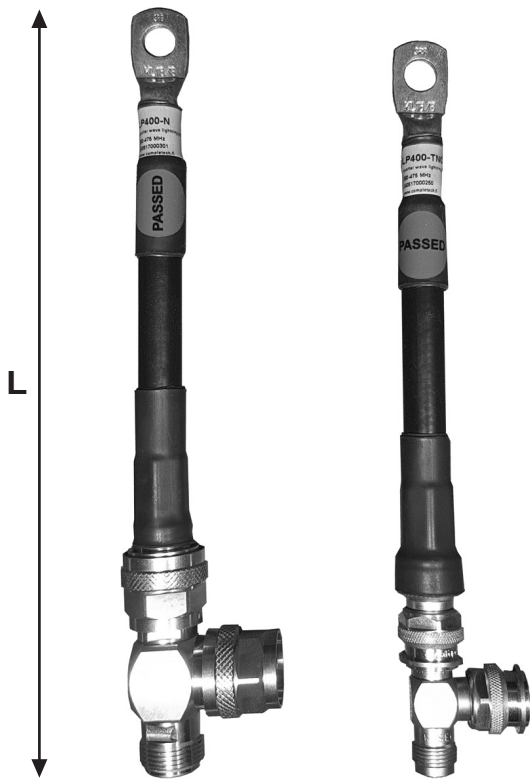


FREQUENCY INDEPENDENT DATA

Description: lightning protector, quarter wave shorting stub
 Frequency: 70-90 MHz, 126-154 MHz, 144-176 MHz, 210-250 MHz, 315-385 MHz, 380-475 MHz, 770-890 MHz, 830-960 MHz, 2300-2500 MHz
 Impedance: 50 ohm
 Connector: N-female - N-male, TNC-female - TNC-male
 VSWR: < 1.2
 Attachment: M8
 Temperature: -40°C - +80°C
 IP: 67 (LP-N)
 62 (LP-TNC)

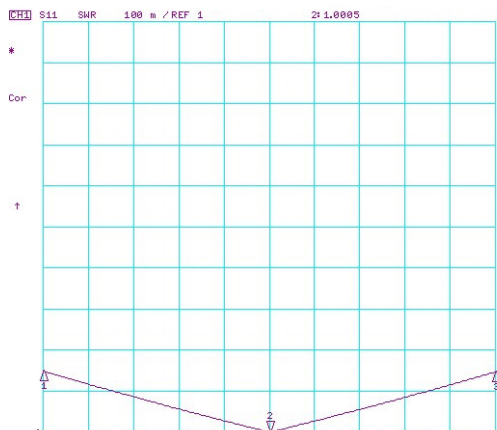

CH1 Markers
 1f 1.14486
 3f 1.14475

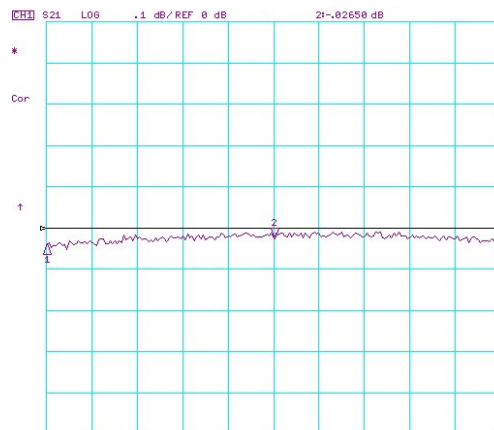

CH1 Markers
 1f -0.04088 dB
 3f -0.02650 dB

LP LIGHTNING PROTECTOR